



REPTILE BROODER

- Innovatively improve stability and durability with centralized heating system
- Automatic Temperature & Humidity setting and control
- Water pump included for humidification
- Reptile UV Lamp
- Built in Anion activation function
- Rotary Door
- UV Lamp&Outlet consent time setting
- Reduce of fan noise inside of brooders and provide better pleasant environment (69dB)
- Alarm function in case of abnormal temperature
- It is possible to stack machine which enable to provide space efficiency (Brooder standing - Option)



* Brooder standing image

RECOMMENDED REPTILE




BROODER


Elegant outer design and optimum inner space distribution



Optimum air circulation technique with BLDC fans



Raptile brooder small (Capacity 60L)

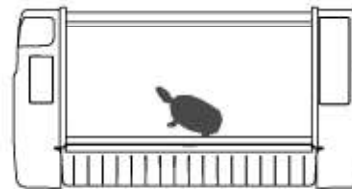

Raptile brooder big (Capacity 90L)

SPECIFICATION

	REPTILE BROODER 60	REPTILE BROODER 90
Name	REPTILE BROODER 60	REPTILE BROODER 90
Model NO.	MX-BS700R	MX-BL700R
Temp. Limits	Ambient temperature ~ 38°C / Ambient temperature ~ 100°F	
Outside environment temp.	Optimum range : 20 ~ 25°C / 68 ~ 77°F	
Humi. Limits	40 ~ 60% (It can be changed according to the conditions)	
Display	FND	
Power	AC 100-120V, 50/60Hz / AC AC 220-240V, 50/60Hz	
Power consumption	Max. 490W / Average 130W	
Size	(W)655 x (L)470 x (H)440mm	(W)855 x (L)470 x (H)440mm
Weight	9.7kg	10.7kg

PTC heated humidification system kills germ

OPTION

• Brooder standing

• Vermiculite



INTERIOR



Water cap



Indoor outlet



UVB lamp